
Appendix A: MMI error messages and connector pin assignments


Appendix A contains the information the maintenance terminal pin assignments and the MMI error messages.

Brand line file

A BRANDLIN.WAV file is copied to the PCMCIA disk to partition A: - the voice partition. Since voice files in the database are uncompressed, they have to be converted to the desired coding law before copying to the target PCMCIA disk. Partition A: is divided into 2 directories - A-law and μ -law, to which the converted voice files are copied.

You must record a brand line greeting for each language separately and copy it to the PCMCIA disk following the directory structure shown in [Figure 17](#).

Figure 17
PCMCIA disk audio file structure

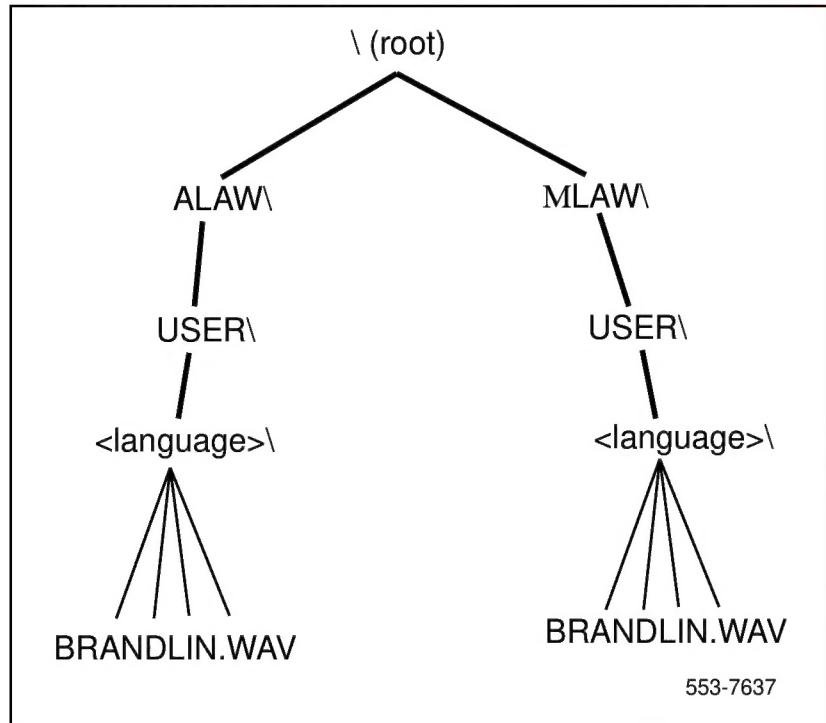

Maintenance terminal cable pin assignments

[Table 18](#) lists the pin assignments for the maintenance terminal cable that connects from the IPE module I/O panel connector to the nullmodem for direct terminal connection, or to a modem for a remote maintenance terminal connection.

Table 18
A0660348 Maintenance cable (Part 1 of 2)

J2 Pin Number (DB-25 pin connector)	J1 Pin Number (50-pin I/O panel connector)	Description
1	25	Reserved
2	22	RS-232 Tx
3	20	RS-232 Rx
4	18	Reserved
5	10	Reserved
6	16	Reserved
7	21	GND
8	17	Reserved
9	11	Reserved
10	24	LAN_Tx+
11	49	LAN_Tx-
12	12	Reserved
13	23	LAN_Rx+
14	48	LAN_Rx-
15	13	Reserved
16	14	Reserved
17	15	Reserved

Table 18
A0660348 Maintenance cable (Part 2 of 2)

J2 Pin Number (DB-25 pin connector)	J1 Pin Number (50-pin I/O panel connector)	Description
18	36	Reserved
19	37	Reserved
20	19	Reserved
21	38	Reserved
22	39	Reserved
23	40	Reserved
24	41	Reserved
25	N.C.	Not Connected

MMI Error Messages

These error messages are displayed on the maintenance terminal during conference events.

Table 19
MMI error messages (Part 1 of 4)

Error message text	Comments
Failure on accepting key code	Check the keycode.
Incorrect login	Enter the correct password.
Incorrect card ID entered	Check the card ID.
Wrong input type	Check the input type.
Input out of range	Specify the input within the rage.
Enter: yes, no, y or n.	Spell out yes or no.
Enter yes or no.	Enter the appropriate response.

Table 19
MMI error messages (Part 2 of 4)

Error message text	Comments
Entered string too long	Check the string length.
Wrong number of input parameters	Check input parameters.
Input should be in HH:MM format	Use the correct time format.
Invalid command for this directory	Check the directory/command.
Command not valid at this point	Check the command.
Audio recording in process, input ignored	Wait until recording is completed.
There are no reports for this date	The specified date has no reports.
Date entered must not be in the future	The date for conference maintenance must be present date.
Date entered is too far in the past	Files are deleted once their age reaches "conf log aging"
Date entered is too far in the future	Reservations can be made only 6 months in advance.
Command must be followed by a valid number.	Choose entry number according to the table presented
Voice file specified does not exist	When defining files per event
Voice file specified already exists	When recording new file
Event must have at least one associated file	Check the event and check the file table for that event.
Start time must be later than current time + 3	For a new conference scheduling.
Number of ports cannot be reduced below number of active ports. Current number of active ports: X	Number of active ports can be reduced only after they are dropped.

Table 19
MMI error messages (Part 3 of 4)

Error message text	Comments
Maximum available ports X exceeded	Used when bridges collide or when more than the maximum number of ports is defined for a conference
Number of ports requested for bridge collides with reserved conferences at the following times.	Followed by a list of colliding conferences.
A day in the past can not be modified	Check the specified date.
Maximum duration is 12 hours	Reduce the conference duration.
Meeting is active or about to open. Use Meeting Modify option for active meeting.	Modify option in Conference Reservation command.
Meeting is in the past or about to end and can not be modified.	Modify option in Conference Reservation command.
Cannot delete a meeting which started in the past or is about to start.	Delete option in Conference Reservation command.
Command is not relevant for meeting which has not yet begun.	In Conference Maintenance directory.
Command must be followed by a valid meeting number.	In Conference Maintenance directory.
This command may not be used for a bridge.	In Conference Maintenance directory.
Meeting may not be scheduled to end within 3 minutes.	In Meeting Modify command.
Meeting ended or was originally scheduled to end within 3 minutes. Duration can not be changed.	In Meeting Modify command.

Table 19
MMI error messages (Part 4 of 4)

Error message text	Comments
Conference scheduled to close within 3 min. may not be terminated.	In Meeting Terminate command, before user confirmation.
Conference closed or scheduled to close within 3 minutes. It may not be terminated.	In Meeting Terminate command, after user confirmation.
This conference begins on the previous day and can be modified only there.	A conference may be chosen for modification from the list of conferences when it begins on the day being displayed.
CDN X already appears in the list.	This Control DN is already assigned.
CDNs reserved for conferences cannot be deleted.	You would have to un-reserve the CDNs you wish to delete.
CDN entered is too long	Check the CDN.
Maximum number of CDNs is already reached	Un-assign CDNs that are not active if you wish to re-assign them.
Error occurred while recording.	You may have to re-record.
CDN provided for recording is available for 2 more minutes!	This is a warning.
Recording session terminated	End of recording is announced.
Invalid port number	Use the correct port number.

